

# NANO X

1.156



**Allowed user weight**

130 kg



**Suitable for passenger transport**

Tested according to ISO 7176-19 (max. user weight 130 kg)






Vario element



Shapely frame concept



Castor wheel connection milled from solid material



Double cross brace for rigid frame-like ride performance

## Design your Freedom

### **EFFICIENCY**

- Permanent provision with adjustment possibilities to functional changes reduces follow-up costs
- Extensive serial equipment minimises necessity for expensive customised parts
- Low wear due to high quality attachments

### **THERAPEUTIC BENEFIT**

- Perfect easy running and little own weight support the independence of the user
- Adaptable to functional changes and individual needs of the user through adjustment of the back, seat and chassis
- Extensive equipment assortment for long-term users

### **FIELD OF USE**

- For permanent and long term provision
- For paraplegic provision
- Very good suitability for many disease patterns, even for severely encumbered
- Users without function of the lower extremities (lateral transfer, driven through the handrims)

ORDER

COST ESTIMATE

CUSTOM DESIGN

Please fax the completed order form to:

05733 922 9311

Customer service 05733 922 311

Billing address / Customer ref. no.:

Delivery address:

Tax-ID

Consignment / Comments:

Order quantity:

MEYRA®

**Allowed user weight**

130 kg

**Suitable for passenger transport**

Tested according to ISO 7176-19 (max. user weight 130 kg)

**Hints**Our Terms and Conditions as stated at [www.meyra.de/AGB](http://www.meyra.de/AGB) shall applyYou can find information on the measurement process at [www.meyra.de/messverfahren](http://www.meyra.de/messverfahren)

Valid from 01.01.2024 – 31.12.2024.

Errors, misprints and changes reserved.

Use our K.I.S.S.S. for orders and configurations at [www.kisss-by-meyra.de](http://www.kisss-by-meyra.de)

You avoid queries and incorrect orders thanks to the buildability check

When transported in public transport (e.g. train), the dimensions of the wheelchair may be higher than the guide values of the transport company. Please inquire in advance.



## Technical specifications

|                                  |                                                                     |
|----------------------------------|---------------------------------------------------------------------|
| Seat widths in mm                | 320/340/360/380/400/420/440/460/480                                 |
| Width ready to drive in mm from  | 480/500/520/540/560/580/600/620/640/660/680                         |
| Seat depth in mm                 | 380/400/420/440/460/480/500                                         |
| Seat height front/rear in mm     | 450 to 530/360 to 510                                               |
| Overall height in mm             | Rear seat height + back support height                              |
| Back support height in mm        | variable from 250 to 450 +/- 15                                     |
| Length with footrest in mm       | 720 - 920 (depending on frame length, wheel size and axle position) |
| User weight                      | 130 kg                                                              |
| Empty weight from                | from 9 kg                                                           |
| Permissible overall weight       | 145 kg                                                              |
| Transport weight                 | from 6,5 kg                                                         |
| Rear wheel                       | 600 mm(24 inch) / 635 mm(25 inch) / 660 mm(26 inch)                 |
| Brake test according to STANDARD | 7°                                                                  |

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**01 Seat width / Seat depth**

|                       | Frame short (C-351) |           |           | Frame middle (C-352) |           | Frame long (C-353) |           |
|-----------------------|---------------------|-----------|-----------|----------------------|-----------|--------------------|-----------|
|                       | (C-368)             | (C-615)   | (C-784)   | (C-618)              | (C-619)   | (C-787)            | (C-792)   |
| Seat width/Seat depth | SD 380 mm           | SD 400 mm | SD 420 mm | SD 440 mm            | SD 460 mm | SD 480 mm          | SD 500 mm |
| SW 320 mm (C-32)      |                     |           |           |                      |           |                    |           |
| SW 340 mm (C-34)      |                     |           |           |                      |           |                    |           |
| SW 360 mm (C-36)      |                     |           |           |                      |           |                    |           |
| SW 380 mm (C-38)      |                     |           |           |                      |           |                    |           |
| SW 400 mm (C-40)      |                     |           |           |                      |           |                    |           |
| SW 420 mm (C-342)     |                     |           |           |                      |           |                    |           |
| SW 440 mm (C-344)     |                     |           |           |                      |           |                    |           |
| SW 460 mm (C-46)      |                     |           |           |                      |           |                    |           |
| SW 480 mm (C-48)      |                     |           |           |                      |           |                    |           |

including utensil pocket under the seat belt

**02 Frame forms**

| CODE | DESCRIPTION                                                                                                                                                                              | ANGLE |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| 346  | Standard front frame                                                                                                                                                                     | 80°   |
| 347  | Compact front frame                                                                                                                                                                      | 88°   |
|      |  Only in combination with frame reduction CODE 4950<br>not i.C. with CODE 327 Ø 142 Soft-solid rubber |       |

**Frame options**

| CODE | DESCRIPTION                                                                         |
|------|-------------------------------------------------------------------------------------|
| 4950 | Taper frame (20 mm each side)                                                       |
| 4959 | Without taper frame                                                                 |
| 721  | Transport eyelet for vehicle-side attachment of the wheelchair                      |
| 903  | Reinforced caster forks                                                             |
|      |  |

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**03 Front seat height (FSH) in combination with castor wheel (without seat cushion)**

Please select your desired seat height by selecting a possible combination of seat height and wheel size.  
The max permissible seat height difference between front and rear seat height is 100 mm!

Recommendation: Solid rubber steering wheels for heavier user weights

Front seat height in mm (FSH)

| Code/Art. | Castor                        | 450 | 460 | 470 | 480 | 490 | 500 | 510 | 520 | 530 |
|-----------|-------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 151/908   | Ø 100 Solid rubber black      |     |     |     |     |     |     |     |     |     |
| 151/909   | Ø 100 Solid rubber grey       |     |     |     |     |     |     |     |     |     |
| 325/908   | Ø 125 Solid rubber black      |     |     |     |     |     |     |     |     |     |
| 325/909   | Ø 125 Solid rubber grey       |     |     |     |     |     |     |     |     |     |
| 327/908   | Ø 142 Soft-solid rubber black |     |     |     |     |     |     |     |     |     |
| 327/909   | Ø 142 Soft-solid rubber grey  |     |     |     |     |     |     |     |     |     |

**Front seat height (FSH) in combination with castor wheel (without seat cushion)**

Front seat height in mm (FSH)

| Code/Art. | Castor                            | 450 | 460 | 470 | 480 | 490 | 500 | 510 | 520 | 530 |
|-----------|-----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 2480      | Ø 100 x 23 Lightwheel black       |     |     |     |     |     |     |     |     |     |
| 2481      | Ø 100 x 32 Castor aluminum silver |     |     |     |     |     |     |     |     |     |
| 2482      | Ø 125 x 32 Castor aluminum silver |     |     |     |     |     |     |     |     |     |

 Tires: CODE 2480 solid rubber, transparent/colored - CODE 2481/2482 solid rubber black

**Seat height front in combination with carbon castor (without seat cushion)**

Front seat height in mm (FSH)

| Code | Castor               | 450 | 4560 | 470 | 480 | 490 | 500 | 510 | 520 | 530 |
|------|----------------------|-----|------|-----|-----|-----|-----|-----|-----|-----|
| 2495 | Ø 100 x 30 mm, Black |     |      |     |     |     |     |     |     |     |
| 2496 | Ø 125 x 30 mm, Black |     |      |     |     |     |     |     |     |     |

 Tyres: solid rubber, black

☐ Please select by ticking the relevant boxes

S

 Special construction/individual solution o.r. - on request

☐ Standard version: If no other selection is made, the standard version will be delivered.

Seat height front in combination with aluminium castor (without seat cushion)

| Code | Castor                | Front seat height in mm (FSH) |     |     |     |     |     |     |     |     |
|------|-----------------------|-------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|
|      |                       | 450                           | 460 | 470 | 480 | 490 | 500 | 510 | 520 | 530 |
| 2483 | Ø 100 x 37 mm, Silver |                               |     |     |     |     |     |     |     |     |
| 2484 | Ø 100 x 37 mm, Black  |                               |     |     |     |     |     |     |     |     |
| 2485 | Ø 100 x 37 mm, White  |                               |     |     |     |     |     |     |     |     |
| 2486 | Ø 100 x 37 mm, Red    |                               |     |     |     |     |     |     |     |     |
| 2487 | Ø 100 x 37 mm, Blue   |                               |     |     |     |     |     |     |     |     |
| 2488 | Ø 100 x 37 mm, Orange |                               |     |     |     |     |     |     |     |     |
| 2489 | Ø 125 x 37 mm, Silver |                               |     |     |     |     |     |     |     |     |
| 2490 | Ø 125 x 37 mm, Black  |                               |     |     |     |     |     |     |     |     |
| 2491 | Ø 125 x 37 mm, White  |                               |     |     |     |     |     |     |     |     |
| 2492 | Ø 125 x 37 mm, Red    |                               |     |     |     |     |     |     |     |     |
| 2493 | Ø 125 x 37 mm, Blue   |                               |     |     |     |     |     |     |     |     |
| 2494 | Ø 125 x 37 mm, Orange |                               |     |     |     |     |     |     |     |     |

 Tyres: solid rubber, black

☐ Please select by ticking the relevant boxes

☒ Special construction/individual solution o.r. - on request

☐ Standard version: If no other selection is made, the standard version will be delivered.

**04 Rear wheels i.c. with seat height (tires CAT 07 and hand rims CAT 06)**

RSH (mm) 360 370 380 390 400 410 420 430 440 450 460 470 480 490 500 510

A

B

C

| CODE | RSH | DESCRIPTION                                                                                                                                                                                                                                                 | Ø   |
|------|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 651  | A   | Standard wheel, incl. quick release axle (pair)                                                                                                                                                                                                             | 24" |
| 2651 | A   | Standard wheel black, incl. quick release axle (pair)<br>⚠ not i.c. with drum brake CODE 706                                                                                                                                                                | 24" |
| 706  | A   | Drum braked wheel with radial spokes and drum brake for accompanying person<br>⚠ Only i.c. with push handles CODE 502<br>only i.c. with CODE 423 wheel camber 0°<br>only i.c. with side panels CODE 98, 81, 84 or 748                                       | 24" |
| 848  | A   | SILVERDESIGN with radial spokes and high flange rim incl. quick-release axle (pair)                                                                                                                                                                         | 24" |
| 695  | A   | Active-wheel with radial spokes, high flange rim, hollow rim (Jumbo rim) in black<br>⚠ *Empfohlen ab 100 kg Nutzergewicht oder bei dynamischer Fahrweise<br>nicht i.V.m. Carbolife Greifreifen CODE 849, 850, 853<br>nicht i.V.m. mit PU-Bereifung CODE 474 | 24" |
| 695  | B   | Active-wheel with radial spokes, high flange rim, hollow rim (Jumbo rim) in black<br>⚠ Recommended from 100 kg user weight or for dynamic driving<br>not i.c. with. Carbolife push rims CODE 849, 850, 853                                                  | 25" |
| 695  | C   | Active-wheel with radial spokes, high flange rim, hollow rim (Jumbo rim) in black<br>⚠ Recommended from 100 kg user weight or for dynamic driving<br>not i.c. with. Carbolife push rims CODE 849, 850, 853                                                  | 26" |
| 2469 | A   | Spinergy CLX, carbon rear wheel, spokes and hub black                                                                                                                                                                                                       | 24" |
| 2470 | A   | Spinergy LX, aluminum rear wheel, spokes, rim and hub black                                                                                                                                                                                                 | 24" |
| 2471 | A   | Spinergy LX, aluminum rear wheel, rim and hub black, spokes white                                                                                                                                                                                           | 24" |
| 2472 | A   | Spinergy LX, aluminum rear wheel, rim and hub black, spokes orange                                                                                                                                                                                          | 24" |

⚠ Seat height data without seat cushion

☐ Please select by ticking the relevant boxes

S

 Special construction/individual solution o.r. - on request

Standard version: If no other selection is made, the standard version will be delivered.

Rear wheel i.c. with seat height (incl. tyre and handrim)

| RSH (mm) 360 370 380 390 400 410 420 430 440 450 460 470 480 490 500 |     |                                                                                                                                                                                                                          |          |  |  |  |  |  |  |  |
|----------------------------------------------------------------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--|--|--|--|--|--|--|
| <div><div>A</div><div>B</div></div>                                  |     |                                                                                                                                                                                                                          |          |  |  |  |  |  |  |  |
| CODE                                                                 | RSH | DESCRIPTION                                                                                                                                                                                                              | Ø        |  |  |  |  |  |  |  |
| 2465                                                                 | A   | Six-Star incl. 8 bar high pressure tires and aluminum handrims (pair)                                                                                                                                                    | 24x1"    |  |  |  |  |  |  |  |
| 752                                                                  | A   | Lightwheel incl. RightRun Light tyres and aluminum handrim black<br><div><div>!</div> only i.c. with 0° wheel camber CODE 423<br/>not i.c. with transport lug CODE 721<br/>Recommended up to max. 90kg user weight</div> | 24"      |  |  |  |  |  |  |  |
| 2473                                                                 | A   | Blacklight aluminum rear wheel, incl. Schwalbe Marathon Plus tyres and aluminum push rims, rim, hub and spokes black                                                                                                     | 24x1"    |  |  |  |  |  |  |  |
| 2466                                                                 | A   | Cross-Rad incl. coarse studded tyres and stainless steel handrims (pair)<br><div><div>!</div> Recommendation: CODE 98 side panel</div>                                                                                   | 24x1.75" |  |  |  |  |  |  |  |
| 2461                                                                 | A   | Day-Lite aluminum rear wheel, rim, hub and spokes black. Black aluminum handrim and black MBL Gazelle tires.<br><div><div>!</div> max. user weight 100kg</div>                                                           | 24x1"    |  |  |  |  |  |  |  |
| 2468                                                                 | B   | Day-Lite aluminum rear wheel, black rim, hub and spokes, black aluminum handrim and black MBL Speedlite tyres.<br><div><div>!</div> max. user weight 100kg</div>                                                         | 25x1"    |  |  |  |  |  |  |  |

!

 Seat height data without seat cushion

Horizontal rear wheel position (center of gravity)

|          | PASSIV (Pos./mm) |      |      | MEDIUM (Pos./mm) |      |      | ACTIVE (Pos./mm)** |       |       |        |
|----------|------------------|------|------|------------------|------|------|--------------------|-------|-------|--------|
|          | 1/35             | 2/45 | 3/57 | 4/69             | 5/81 | 6/93 | 7/105              | 8/115 | 9/135 | 10/147 |
| Position |                  |      |      |                  |      |      |                    |       |       |        |

!

 Axle position in mm (rear edge of back tube to center of axle)

05 Rear wheel options

| CODE                                                                                                                                                                                            | DESCRIPTION            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| 865                                                                                                                                                                                             | Performance Varioblock |
| <div><div>!</div> not i.c. with CODE 61 24" and RSH 480mm</div> <div><div>!</div> not i.c. with CODE 62 25" and RSH 500mm</div> <div><div>!</div> not i.c. with CODE 68 26" and RSH 510mm</div> |                        |

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.

## Wheel camber

| CODE | DESCRIPTION                        |
|------|------------------------------------|
| 423  | 0° wheel camber                    |
| 447  | 3°-wheel camber (track adjustable) |

## 06 Handrims

| CODE | DESCRIPTION                                                                                                                                                                                                | Ø           |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| 493  | Stainless steel, polished                                                                                                                                                                                  | 24"/25"/26" |
| 494  | Aluminum silver anodised<br> Not i.c. with Active-Wheel CODE 695                                                          | 24"         |
| 445  | Titanium, with 6 brackets<br> Only in combination with Aktiv-Wheel CODE 695 or Spinergy-Wheel CODE 2469, 2470, 2471, 2472 | 24"/25"/26" |
| 168  | Optigripp-special handrim for tetraplegics                                                                                                                                                                 | 24"         |
| 849  | Curve L, aluminum black anodised, ergonomic handrim profile, H 31 mm                                                                                                                                       | 24"         |
| 850  | Curve L Tetra Grip, anti-slip coated, aluminum, suitable for quadriplegics, ergonomic handrim profile, H 31 mm                                                                                             | 24"         |
| 853  | Gekko, aluminum black anodized with replaceable rubber lip, ergonomic hand rim profile, H 31mm                                                                                                             | 24"         |

## Hand rim options

| CODE | DESCRIPTION                                                                                                                                                          |     |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 166  | Silicon hand rim cover, smooth, black<br> Not i.c. with Aluminum handrim CODE 494 | 24" |
| 692  | Handrim distance narrow                                                                                                                                              | 24" |
| 693  | Handrim distance far                                                                                                                                                 | 24" |

☐ Please select by ticking the relevant boxes

S

Special construction/individual solution o.r. - on request

Standard version:

If no other selection is made, the standard version will be delivered.

07 Tyres

| CODE | DESCRIPTION                                                           | Ø     |       |       |
|------|-----------------------------------------------------------------------|-------|-------|-------|
| 496  | Pneumatic tires 8 bar                                                 | 24x1" |       |       |
| 395  | Maxxis VN Master Alpha Protect tyre black, puncture resistant, 10 bar | 24x1" | 25x1" | 26x1" |
| 897  | Schwalbe Marathon Plus Evolution tires, puncture resistant            | 24x1" | 25x1" | 26x1" |
| 363  | Schwalbe ONE tires, no profile, puncture resistant                    | 24x1" |       |       |
| 474  | PU-tyres, puncture safe black                                         | 24x1" |       |       |

08 Brakes

| CODE | DESCRIPTION                                                                                                                                |
|------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 305  | Pressure brake for user<br><div><div>!</div>*Max. Antriebsradposition 6 i.V.m. Rahmen kurz CODE 351</div>                                  |
| 2595 | Light pressure brake made of aluminum, swing away                                                                                          |
| 652  | Pressure brake, brake lever cranking near the side panel<br><div><div>!</div>not i.c. with side panel CODE 81 and side panel CODE 84</div> |
| 681  | Brake lever extension, foldable, firmly mounted<br><div><div>!</div>Only i.c. with CODE 305 or CODE 652 pressure brake</div>               |

09 Backrest height (BH)

| DESCRIPTION                                                  | Backrest height in mm |         |         |         |         |
|--------------------------------------------------------------|-----------------------|---------|---------|---------|---------|
|                                                              | (C-620)               | (C-626) | (C-631) | (C-632) | (C-633) |
| Back strap, adaptable via Velcro straps adjustable +/- 15 mm | 250                   | 300     | 350     | 400     | 450     |

!

 In combination with CODE 502 no subsequent height adjustment

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**Backrest variants**

| CODE | DESCRIPTION                                                                                                                                                                      |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2002 | Back cover 20 mm wider<br> only i.c. with CODE 235 textile black or 292 mesh, breathable, black |
| 2003 | Back cover 40 mm wider<br> only i.c. with CODE 235 textile black or 292 mesh, breathable, black |
| 593  | Without back cover<br> recommended when using RIDE back systems                                 |

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**10 Backrest**

Standard 90° to the seat  
Adjustable angle and lockable  
Backrest angle: -5°/ +5°/ + 10°

| CODE | DESCRIPTION                                                                                   |
|------|-----------------------------------------------------------------------------------------------|
| 410  | Back with push handle, short                                                                  |
| 411  | Backrest without push handle                                                                  |
| 502  | Backrest with push handle mounted to the frame tube, continuously height adjustable to 150 mm |
| 141  | Push handles, swivel-away                                                                     |
| 2310 | Backrest tubes extended 15mm per side                                                         |
| 2311 | Backrest tubes extended 25mm per side                                                         |
| 2312 | Backrest tubes retracted 15mm per side                                                        |
| 2313 | Backrest tubes retracted 25mm per side                                                        |

**Backrest options**

| CODE | DESCRIPTION                                                                                                                                                                                   |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 818  | *Rücken nach vorne auf den Sitz klappbar                                                                                                                                                      |
| 2032 | ErgoSeat Pro laterals, small, pair<br> Recommended at back height 300 - 400 mm                             |
| 238  | Stabilising bracket for the back support, folding<br> Not i.c. with push handles CODE 502<br>from SW 320mm |

**Back strap colours**

| CODE | DESCRIPTION              |
|------|--------------------------|
| 235  | Textile black            |
| 292  | Mash, breathable , black |

**11 Ride System Back**

Please specify the CODE from the RIDE order sheet:

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**12 Seat cushions**

| CODE | DESCRIPTION                       |
|------|-----------------------------------|
| 560  | Seat cushion 30 mm                |
| 561  | Seat cushion 60 mm                |
| 7199 | Netti Contour Breathable 3D cover |
| 562  | Velcro strip on seat belt         |

**13 Ride System Seat**

Please specify the CODE from the RIDE order sheet:

**14 Arm supports and arm pads**

1 = fixed screwed 2 = swivel up 3 = detachable 4 = lockable 5 = height-adjustable armrest 6 = with wheel cover

| CODE | DESCRIPTION                                                                                                                                                                                        | FUNCTIONS |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| 748  | Side panel made of aluminium in black with cold protection insert<br> incl. height adjustable armrest (screwed) | 1,5,6     |
| 100  | Side panel made of aluminium in black with cold protection insert<br> incl. mudguard 35mm                       | 1,6       |
| 98   | Side panel made of aluminium in black with cold protection insert<br> incl. mudguard 50mm                       | 1,6       |
| 783  | Carbon fiber side guard<br> incl. mudguard 35mm                                                                 | 1,6       |

**Side guard options**

| CODE | DESCRIPTION                                                                                                                                                                    |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11   | Side guard removable<br> only i.c. with CODE 100 or 783                                     |
| 2903 | Sideguard holder aluminum black reinforced<br> not i. c. with side guard detachable CODE 11 |

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**15 Footrests**

LLL (mm) 360 370 380 390 400 410 420 430 440 450 460 470 480

**A****B**

| CODE    | LLL (mm) | DESCRIPTION                                                                                                                                                                                                                                                                     |
|---------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 97      | <b>A</b> | Footrest folding<br> *nur i.V.m. Fußplatte CODE 311<br>i.V.m. ohne Rahmeneinzug CODE 4959 ab Sitzbreite 340mm<br>i.V.m. Rahmeneinzug CODE 4950 ab Sitzbreite 380mm                             |
| 312     | <b>A</b> | Footrest continuous made of sturdy aluminum profile in black folds up, height and angle adjustable                                                                                                                                                                              |
| 311     | <b>A</b> | Footrest continuous aluminum in black fold up, height and angle adjustable                                                                                                                                                                                                      |
| 4312    | <b>A</b> | LED footrest made of sturdy aluminum in black continuous, height/depth and angle adjustable, incl. Bluetooth module<br> i.C. with CODE 4959 from SW 360mm<br>i.C. with CODE 4950 from SW 400mm |
| 4313    | <b>A</b> | LED footrest made of sturdy aluminum in black continuous, height / depth and angle adjustable<br> i.C. with CODE 4959 from SW 360mm<br>i.C. with CODE 4950 from SW 400mm                       |
| 808     | <b>A</b> | Single footplates made of aluminium in black, foldable, depth and angle adjustable                                                                                                                                                                                              |
| 312/663 | <b>B</b> | Footrest swivels outward                                                                                                                                                                                                                                                        |
| 359     |          | Calf belt                                                                                                                                                                                                                                                                       |

☐ Please select by ticking the relevant boxes S Special construction/individual solution o.r. - on request  
Standard version: If no other selection is made, the standard version will be delivered.

16 Frame colours

| CODE | DESCRIPTION       |
|------|-------------------|
| 130  | Titanium grey     |
| 206  | Matt black        |
| 224  | Blue-Metallic     |
| 227  | Red Metallic      |
| 4044 | Red Metallic Matt |
| 4049 | Olive green Matt  |
| 4050 | Sky Blue          |
| 4051 | Chalk             |
| 4922 | Metallic green    |
| 4919 | Silverline        |

☐ Please select by ticking the relevant boxes

S

 Special construction/individual solution o.r. - on request

☐ Standard version: If no other selection is made, the standard version will be delivered.

17 Frame design

| CODE | DESCRIPTION        | COLOUR    |
|------|--------------------|-----------|
| 2300 | Reflective Sticker | white     |
| 2301 | Reflective Sticker | black     |
| 2302 | Reflective Sticker | Tricolore |
| 2303 | Reflective Sticker | Rainbow   |

Sticker design

| CODE | DESCRIPTION                                                                                                                                                                           |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2304 | MEYRA Design                                                                                                                                                                          |
| 2305 | STRIPE Design                                                                                                                                                                         |
| 2306 | Sticker applied at MEYRA.<br> only i.c. with the colours white, black and tricolore and MEYRA Design |

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**18 Options****Hand and spoke guard**

| CODE | DESCRIPTION                                                                                                                                                         |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 489  | Transparent<br> Not in combination with Spinergy-Wheel CODE 2469, 2470, 2471, 2472 |

**Support castors**

| CODE | DESCRIPTION                                                                                                                                                                                    |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 691  | Anti tipper, 1 pair, swivel under the seat (recommended)<br> Not i.c. with step tube CODE 309                 |
| 712  | Anti tipper, mounted on the left, swivels under the seat<br> Not in conjunction with step tube CODE 309/4930  |
| 713  | Anti tipper, mounted on the right, swivels under the seat<br> Not in conjunction with step tube CODE 309/4931 |

**Pedal tubes**

| CODE | DESCRIPTION                                                                                                                                                |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 309  | Pedal caps (1 pair)<br> not i.c. with CODE 728/729/730 Support castors  |
| 4930 | Pedal cap, mounted left<br> not i.c. with CODE 729/730 Support castors  |
| 4931 | Pedal cap, mounted right<br> not i.c. with CODE 728/730 Support castors |

**Other accessories**

| CODE | DESCRIPTION                                                                                                                                      |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| 833  | Safety belt                                                                                                                                      |
| 970  | Crutch holder<br> only in combination with CODE 309/4390/4391 |
| 819  | Reflectors<br> not in v.v.m. CODE 752, 2473, 2461 and 2468    |

USER DATA

First name

Name

Street

ZIP CODE

City

Country

Birthday

Diagnosis 1

Diagnosis 2

Tel.

Mobil

E-mail

Order number

Health insurance fund / cost unit

Specialist trade Contact person/phone.

Supply specialist MEYRA

Approval info from week

ANATOMICAL DATA (IN MM)

1) Seat depth

2) Seat width

3) Chest width

4) Chest depth

5) Elbow height

6) Armpit height

7) Back height


8) Head height

9) Forearm length

10) LLL

Body height

Weight (kg)

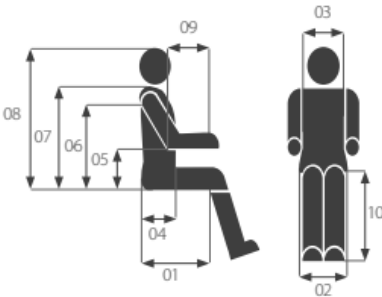

Remarks

I accept the Terms and Conditions of Meyra Distribution GmbH (valid as of January 2023)

<https://www.meyra.com/gtc/>

Date

City

Signature



**14** Code 100



**14** Code 98



**08** Code 305



**10** Code 410



**00** Code 418



**00** Code 419



**10** Code 502



**08** Code 652



**14** Code 748



**14** Code 783



**08** Code 2595



**15** Code 4312



**08** Code 681



**18** Code 729