

Home Lift Cabin platform lifts



HOME LIFT ECO



HOME LIFT

*Versatility, safety
and durability:
the quality Home
Lift BV tailored
for you*

MORE THAN **130.000** INSTALLATIONS
ALL OVER THE WORLD



VERSATILITY



HOME LIFT

Our cabin platform lift EcoVimec and Easy Move give added value to their setting, through simple tailormade installations, both indoors and out.

Available **from two to five floors**, it is an ideal system both for renovation projects and for new buildings: no masonry work required.

VALUE, COMFORT AND SECURITY

Quiet and discreet, it is absolutely convenient even for transporting the shopping, child buggies and any other heavy or bulky items from one floor to another within the home.

With EcoVimec and Easy Move, getting around the house could not be easier. They fit into any surroundings, guaranteeing your home **a prestige installation that will increase its value.**

LED BAR
STANDARD



STARRY SKY



INTEGRATED HANDLE





HOME LIFT ECO WITH STRUCTURE

The cabin platform lifts **Home lift** have state of the art structures in terms of strength, versatility and design.

These structures can be customised with different types of glass panelling to suit installations of all kinds, with tailor-made versions and installations even in particularly difficult applications.

A **Home lift** outdoor lift never requires invasive building works: installation is completed quickly and with great care, thanks to a network of skilled dealers always up to date with the latest products and techniques.

Home Lift Eco

ELECTRIC, ECOLOGICAL,
EXCLUSIVE

The Home Lift lift fits into any domestic context with discretion and elegance.

It is a 100% Italian product, and every installation clearly reflects its membership of the world-famous Italian design and styling tradition.



HOME LIFT





WHY CHOOSE VIMEC

TOP ITALIAN DESIGN

INCREASES THE VALUE
OF THE HOUSE

TAILOR-MADE COMFORT
IN COMPLETE SAFETY

CUSTOMIZABLE
UPGRADE

CONTAINED MASONRY
WORKS

PROXIMITY
SERVICES



HOME LIFT


Available finishes

Home lift Eco

DOORS



AUTOMATIC TELESCOPIC DOORS TWO SPEED (AUTOMATIC MANEUVER)



INFRARED SENSORS ALL AROUND THE PERIMETER FOR ENTRY/EXIT FROM THE CABIN, TO GUARANTEE FULL SAFETY



THREE SPEED AUTOMATIC TELESCOPIC AND LANDING DOORS



DOUBLE HINGED, IN GLASS, FOR AN ELEGANT, STYLISH EFFECT



PANORAMIC, IN ALUMINIUM; LIGHTNESS AT HAND



BLIND HOLLOW VENEERED



HOLLOW VENEERED WITH VIEWING

ALTERNATIVE COLORS



INOX





SPECIAL RAL ON DEMAND

Available finishes

Home Lift Eco

CONTROL PANEL

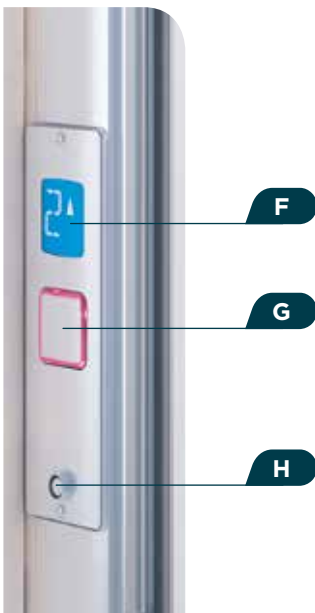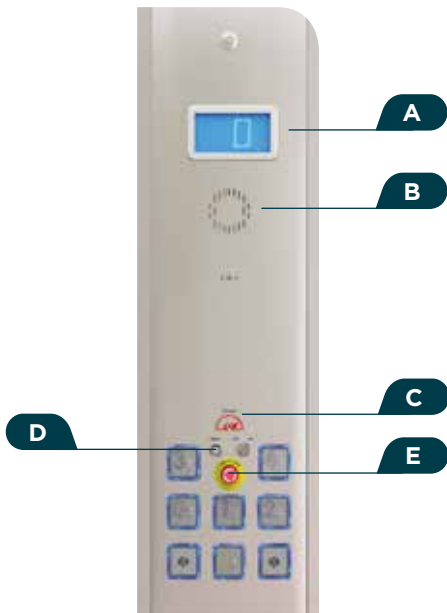

ON BOARD

- A. DISPLAY
- B. LOUDSPEAKER (OPTIONAL)
- C. LOAD INDICATOR
- D. I-BUTTON, FOR ELECTRONIC ACCESS FLOOR CONTROLS
- E. ALARM PUSHBUTTON

FLOOR

- F. LCD DISPLAY WITH TRAVEL INDICATOR
- G. CALL BUTTON: GREEN WHEN LIFT IS FREE, RED WHEN BUSY
- H. I-BUTTON, FOR ELECTRONIC ACCESS CONTROL

COLORS



CABIN WALLS



GREY STANDARD



TRANSPARENT GLASS



BEIGE STANDARD



SMOKY GREY GLASS




BLU STANDARD



MAPLE TANDARD



WHITE OPACO



CHERRY STANDARD



SPECIAL RAL ON DEMAND



POLISHED LINEN




CABIN PLATFORMS



GREY WITH STAMPS



LIGHT GREY



DARK GREY



RED



WILD PEAR



SUPPORTING STRUCTURES



VIMEC 7040 STANDARD



RAL 1013 LIGHT IVORY



RAL 9023 PEARL DARK GREY



RAL 7016 GREY ANTHRACITE



SPECIAL RAL ON DEMAND


IDEAL
FOR PUBLIC
AND COMMERCIAL
ENVIRONMENTS




Specifications

Home Lift Eco


DIMENSIONS AND OVERALL SPACES

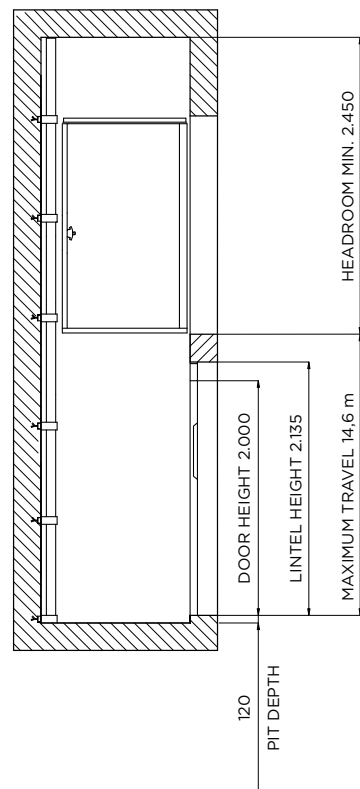


WITH TELESCOPIC DOORS

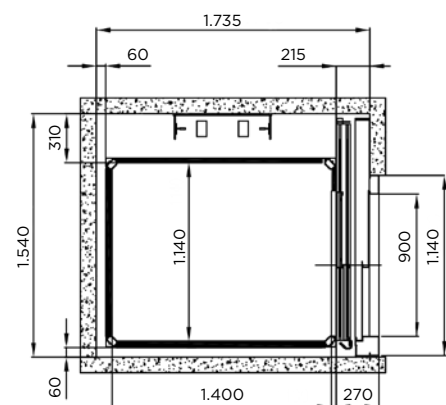

MASONRY SHAFT

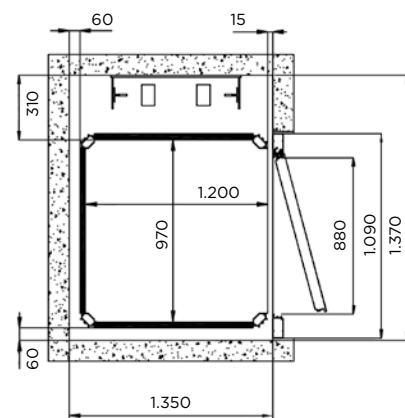

SUPPORTING STRUCTURE

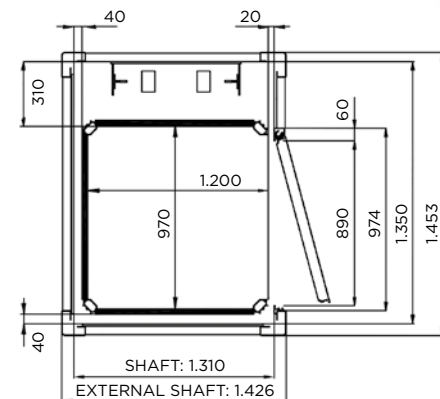


Home Lift ECO HL VERSION (HEAVY LOAD)

THE ECO - HL VERSION (HEAVY LOAD) HAS A **HIGHER LOAD CAPACITY**: 500 kg.

THE FINISHES AVAILABLE FOR THE VERSION OF HL ARE THE SAME OF ECOVIMEC; THIS SOLUTION IS PROVIDED WITH A MORE POWERFUL ENGINE (2.2 kW) AND THE STRUCTURE IS STRONGER AND MORE DURABLE. THE PLATFORM SIZES AVAILABLE FOR THIS MODEL ARE: 1.460x1.170 mm AND mm 1.300x1.030.

AS AN OPTION, HL VERSION CAN BE SUPPLIED WITH A COUNTERWEIGHT (150 Kg ONLY), WHICH MAKES IT IDEAL FOR THE MOST INTENSIVE USES.

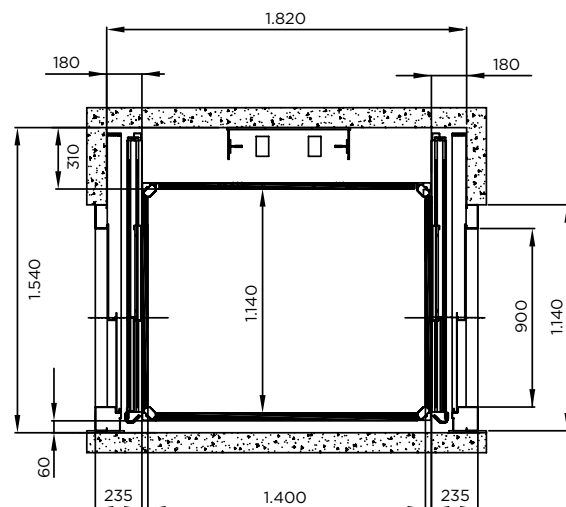

Specifications

Home Lift Eco

STANDARD CONFIGURATIONS

CABIN WITH "COLOR SERIES" GREY WALLS (ALTERNATIVE CHOICES: BEIGE, BLUE, MAPLE, CHERRY)

PLATFORM "RUBBER SERIES" WITH GREY STAMPS

ON-BOARD AND ON THE FLOOR 50 mm BUTTONS WITH BRAILLE, WITHOUT DISPLAY

"ENERGY SAVING" WITH LED BAR CEILING

HOLLOW VENEERED DOORS WITH WINDOW

IN CONFORMITY WITH THE MACHINERY DIRECTIVE EC 42-2006

OPTIONS

I-BUTTON (ELECTRONIC KEY) TO MANAGE INDEPENDENT ACCESSES

VOICE ANNOUNCER TO THE INCOMING FLOOR

GONG TO THE INCOMING FLOOR

AUTO DIALER WITH 5 NUMBERS IN MEMORY

DISPLAY IN THE CABIN

DISPLAY ON THE FLOOR CONTROL PANEL

HANDLE FITTED TO CABIN WALL FOR USE IN PUBLIC PLACES AND FOR PEOPLE WITH DISABILITIES

SLIDING DOORS ON CABIN AND AT ALL FLOORS

POWER DOOR OPERATOR FOR SWING DOORS

FIRE RATED DOORS

VERTICAL OR HORIZONTAL MIRROR

TECHNICAL DATA


ECOVIMEC - GENERAL FEATURES			ECOVIMEC - INSIDE THE CABIN	
A	DRIVE SYSTEM AND AT-THE-GROUND CONTROL		A	INFRARED BARRIERS ON EACH SIDE OF ENTRY AND IN THE ABSENCE OF WALLS
B	BELT DRIVE		B	DEVICE OF COMMUNICATION WITH OUTSIDE THE CABIN
C	DRIVE MOTOR	1,5 kW THREE-PHASE 220 V 50 Hz	C	OVER LOAD INDICATOR
D	ELECTRIC TRACTION		D	50 X 50 mm BUTTONS WITH MECHANICAL SHUTTER AND INDICATION OF THE FLOOR IN ADDITION TO STANDARD BRAILLE
E	SOFT START/STOP SYSTEM		E	ON BOARD CONTROLS HEIGHT COMPLIANT TO EN81-41
F	VOLTAGE SUPPLY	24 V dc	F	ILLUMINATED BUTTONS (WITH COLOR IDENTIFICATION OF THE FUNCTION)
G	MECHANICAL KEY ENABLING ON-BOARD KEYPAD		G	EMERGENCY BUTTON
H	NO. 6 ACCESSES MAXIMUM		H	"ENERGY SAVING" LED BAR LIGHTS
I	NO. 2 ACCESSES TO THE FLOOR MAXIMUM		I	ON BOARD PUSH-BUTTON PANEL WITH DEAD-MAN'S CONTROLS-ALWAYS EQUIPPED WITH INFRARED PHOTOCELLS BARRIERS
J	TRICAL SAFETY LOCKS		J	"SINGLE TOUCH" OPERATION (UNIVERSAL MANOEUVRE) WITH WALLS AND DOOR IN THE CABIN
K	ON FLOOR CONTROLS WITH "SIMPLE TOUCH"			
L	PIT	120 mm FOR MASONRY SHAFT 140 mm FOR STRUCTURE		
M	TECHNICAL DIMENSIONS (ENGINE, BELTS)	310 mm		
N	TESTATA MINIMA STANDARD	2.450 mm		
O	HEADROOM MINIMUM STANDARD	2.600 mm		
P	PLATFORM SIZES AVAILABLE			
Q	2 STANDARD	1.400x1.100 - 1.250x1.000		
R	SPECIAL SIZES AVAILABLE UPON REQUEST			
			CAPACITY	UP TO 400 kg
			MAXIMUM TRAVEL	5 STOPS (14,6M)
			SPEED	0,15 m/s

DATA ARE GUIDELINE AND NOT BINDING. VIMEC RESERVES THE RIGHT TO MAKE ANY CHANGES IT CONSIDERS APPROPRIATE.


Specifications

Easy Move


DIMENSIONS AND OVERALL SPACES

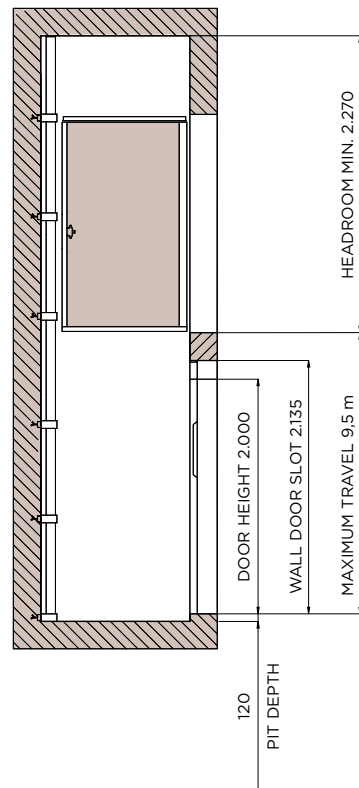


WITH TELESCOPIC DOORS

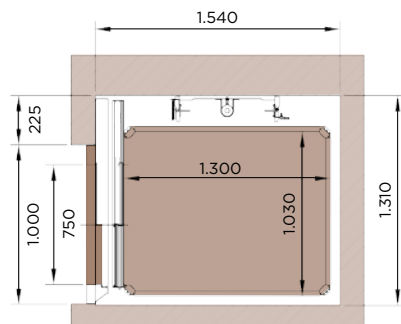

MASONRY SHAFT*

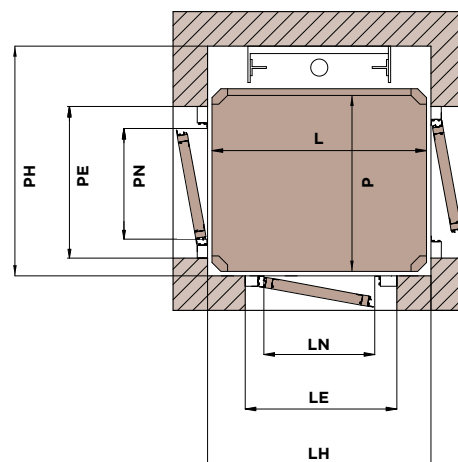

STRUCTURE*

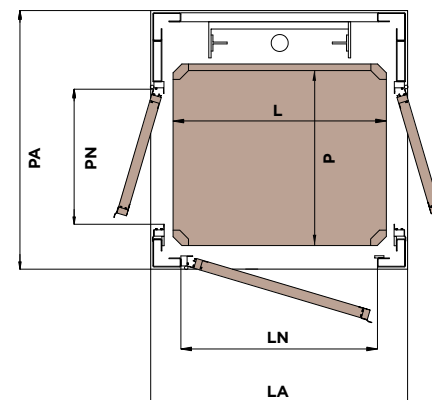

*MASONRY SHAFT

CABIN	L	900	1.250	1.400	770	850	1.250
	P	850	1.000	1.100	950	1.250	1.250
WALL SHAFT	LH	930	1.280	1.430	800	800	1.280
	PH	1.090	1.240	1.340	1.190	1.490	1.490

*STRUCTURE

CABIN	L	900	1.250	1.400	850	1.250
	P	850	1.000	1.100	1.250	1.250
WALL SHAFT	LA	1.045	1.395	1.545	995	1.395
	PA	1.195	1.345	1.445	1.595	1.595

L: CABIN WIDTH
P: CABIN DEPTH
LH: MASONRY ROOM WIDTH
PH: MASONRY ROOM DEPTH
LA: STRUCTURE WIDTH
PA: STRUCTURE DEPTH
LN-PN: DOORWAY WIDTH
LE-PE: DOOR ENCUMBRANCE

NB: ADD 45 mm FOR EACH ADDITIONAL CABIN WALL TO THE COMPARTMENT DIMENSIONS, AND 100 mm FOR THE FOLDING DOOR ON THE SIDE OF THE CABIN.

Specifications

Easy Move

GENERAL FEATURES

VERSATILE HYDRAULIC LIFT

CUSTOMIZABLE TO THE NEEDS OF THE USER AND THE BUILDING

IDEAL BOTH FOR RENOVATION PROJECTS (EASY TO INSTALL IN EXISTING SHAFTS) AND IN NEW INSTALLATIONS, SINCE SPECIAL BUILDING WORKS SUCH AS AN EXTRA ROOM TO HOUSE MACHINERY OR A PIT UNDERNEATH THE LIFT, ARE NOT REQUIRED

THE PIT REQUIRED IS TRULY NEGLIGIBLE, SINCE A RECESS JUST 12 CM DEEP IS ALL THAT IS NEEDED

THE LIFT RUNS ON THE STANDARD VOLTAGE OF 220/240 V AND ITS POWER CONSUMPTION IS 1.8 kW

IN CONFORMITY WITH THE MACHINERY DIRECTIVE EC 42-2006

THE INSTALLATION IS AUTOMATIC WHEN THERE ARE TELESCOPIC DOORS INSIDE THE CABIN

HEAVY DUTY: FOR HIGHER LOAD CAPACITY

E07 HD

WHEN THE INSTALLATION REQUIRES A LIFT ABLE TO TAKE LOADS OF CONSIDERABLE SIZE AND WEIGHT, THE E07 HEAVY DUTY ALLOWS THE TRANSPORTATION OF TROLLEYS, BEDS AND OTHER OBJECTS WHICH REQUIRE EXTRA SPACE, WITHOUT DIFFICULTY AND WHILE MAINTAINING A STYLISH APPEARANCE.



PLATFORM DIMENSIONS

10 STANDARD CONFIGURATIONS:

1.400x1.300 - 1.600x900
1.800x900 - 2.000x900
2.200x900

1.400x1.400 - 1.600x1.000
1.800x1.000 - 2.000x1.000
2.200x1.100

RATED LOAD	FROM 500 TO 600 kg
MAXIMUM TRAVEL	8,5 m

TECHNICAL DATA

EASY MOVE		
A	WORKING LOAD	UP TO 400 kg
B	TRAVEL	9,5 m
C	SPEED	0,15 m/s
D	PIT	120 mm FOR MASONRY SHAFT 140 mm FOR STRUCTURE
E	CABIN "ENCLOSED" WITH WALLS OR INFRARED BARRIERS	
F	"SIMPLE TOUCH" CALLING TO FLOOR	
G	ARRIVAL AND DEPARTURE WITH SOFT START/STOP SYSTEM	
H	DEVICE FOR COMMUNICATION WITH OUTSIDE OF CABIN	
I	AUTOMATIC SAFETY LEVELLING WITHIN	+/- 20 mm
J	CERTIFIED SAFETY VALVE	
L	ELECTRIC LOCKS WITH CERTIFICATION	UNI EN 81-2

DATA ARE GUIDELINE AND NOT BINDING. VIMEC RESERVES THE RIGHT TO MAKE ANY CHANGES IT CONSIDERS APPROPRIATE.

EASY MOVE - ELECTRICAL SYSTEM	
POWER	1.8 kW
MAINS VOLTAGE	230 V-MONO
MOTOR POWER SUPPLY VOLTAGE	230 V
AUXILIARY POWER SUPPLY VOLTAGE	24 V

PLATFORM DIMENSIONS

4 STANDARD CONFIGURATIONS:

770x950 - 1.250x1.000 - 1.250x1.250
1.400x1.100 - 1.460x1.170

SPECIAL PLATFORM SIZES:
AVAILABLE



HOME LIFT



AZIENDA CON SISTEMA QUALITÀ
CERTIFICATO DA DNV
= UNI EN ISO 9001/2008 =

Made in Italy



HOME LIFT



HOME LIFT

Home Lift ACCESSIBILITY

VIMEC ACCESSIBILITY L.T.D.

Suite 56 Basepoint Business Centre
Caxton Close | Andover Hampshire SP10 3FG
Fax +44 01606 330 777
export@vimec.biz | www.vimec.biz/en

HEADQUARTER:

Luzzara (RE) | Italy
www.vimec.biz

VIMEC SUBSIDIARIES:

Madrid (Spain)
Avignon (France)
St. Petersburg (Russia)
London (United Kingdom)
Warsaw (Poland)

Company subject to management and coordination by Investmentaktiebolaget Latour.