


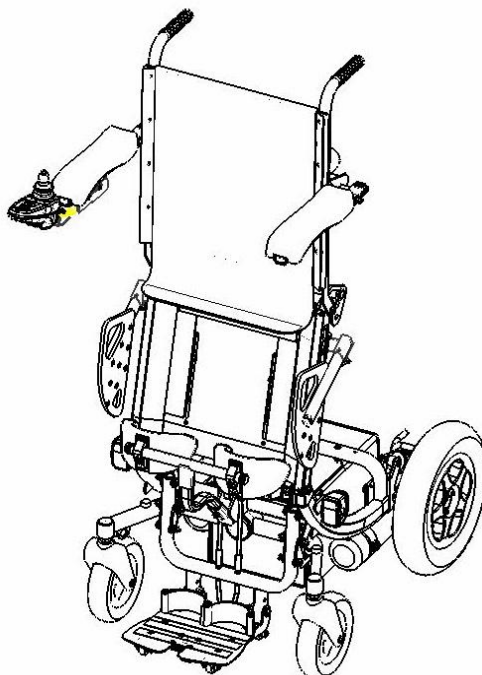

P-Access specifications: power standing wheelchair:

Rigid steel frame with suspension and front rocking arm with integrated anchorage systems for car transportation.

Length with footplate up	: 74 cm / 29"
Length with footplate down	: 105 cm / 41"
Width with standard armrest	: 64,50 cm / 25.40"
Seat depth: adjustable from	36 cm / 14" to 54 cm / 21.25"
Seat width	: 45 cm / 17.5" with side guards
Seat high	: 50 cm / 20" at front
Seat angle	: minus 3° from front to rear.
Turning radius	: 74 cm

Seat: seat depth adjustment, tight upholstery.

Backrest: electrically adjustable on 32° with tight upholstery.

Chest strap with safety buckle.

Armrest: polyurethane, height adjustment, flip-up backwards.

Footrest: height and angle adjustment, swing up backward.

Knee support: - adjustable in depth, height and width.

Wheel
- front: solid maintenance free Ø 200 x 50 mm
- rear: inflate Ø 360 x 80 mm.

Electronic Dynamic LinX on swing away device.

Motor : 2 DC motors of 350 watts.

Speed : 6 or 10 km/h according to local regulation.

Batteries Capacity : 2 x 55 Amp range 20-25 km (charger IEB 8 Amp / 24 volts).

or 2 x 85 Amp range 30-35 km (charger 12 Amp / 24 volts).

Wheelchair weight
- without batteries: 70 kg / 155 lb
- with batteries 55 Ah :108 kg / 238 lb
- with batteries 85 Ah :122 kg / 270 lb

Maximum user weight : 120 kg / 264lb.

User name :	Size : Weight :	Indicate choice	Retail €uros price without VAT	
P-Access	Max user size : 1.80 m.		8 999	P-00.200/XX
Driving				
	Speed (in km/h)	6 ☐ ou ☐ 10	Free of charge	
	Remote control	left ☐ ■ right	Free of charge	
	Attendant control	left ☐ ■ right	900	DLX-AT
	Integrated tray table middle	☐	2 400	HUKA
	Long distance pack : 2x batteries 85 Ah	☐	390	BAT-085-12
	LED road with turning and flashing lights	☐	450	PAC-O-ROAD

Main frame colour	White	■	Free of charge	P-00.200/WT
	Red Ferrari	☐	Free of charge	P-00.200/RD
	Green anis	☐	Free of charge	P-00.200/GR
	Blue metal with gold glitters	☐	300	P-00.200/BL
	Black metal with gold glitters	☐	400	P-00.200/BK
	Any color on request (with RAL code indication)	☐	500	P-00.200/RAL
Battery box colour	Black	■	Free of charge	P-00.215/BK
	White	☐	Free of charge	P-00.215/WT
	Carbon looking	☐	100	P-00.215/CB
Knee pad support	Regular	■	Free of charge	P-00.243/M
	Extended (if size > 1.75m)	☐	100	P-00.243/L
	Extra large & comfort kneepad	☐	260	P-97.100/00

Positionning			
4 points harness (instead of safety belt)	☐	220	Harness-4P-M
Pectoral bar support with foam protection	☐	260	P-97.125/48
Pectoral bar support with chest support cushion	☐	490	PU-KO-7S
Foam seat cushion	■ 45x45x8	120	CU-KALLY 46x45x8
Foam cushion with air controlled by valve	☐ 40x40x8	350	CU-SK40040080
Foam cushion with air controlled by valve	☐ 45x45x8	350	CU-SK45045080
Rigid backrest with backrest cushion & lateral supports	☐	1 200	PH-BACKREST4550
3 axles contoured headrest	☐	280	Headrest-3 axis-std
Headrest support bar (between push handles)	☐	230	HA-KO-ALU-C22
Footrest riser (+28 mm)	☐x1 ou ☐x2	35	P-00.240/00
Heel strap (pair)	☐	100	P-00.234/00
Ankle belt	☐ S - ■ M - ☐ L	200	Anke-Belt-X
Dorsal bag			

Accessories			
Flip-up tray table	left ☐ right	590	P-97.120/45
WISTOP: distance “stop and go” controller	☐	900	WISTOP
Pair of notched anti-puncture tires at rear	☐	220	Tire-insert 300-8-GR
Black tires (set of 4)	☐	180	-

■ Default selection ☐ option to be checked if different choice / in grey, option that must be ordered together

Sales conditions: Ex-works factory: pre-payment before shipment.

Any order implies full acceptance of general terms and conditions of sale online at www.4power4-powerstand.com.

Company name : **VAT #:**
 Contact name :
 e.mail : **GSM :**

Date, signature & company seal